


All Dielectric Drop Cable

Features & Applications:

- Aerial installation
- Easy & simple installation
- Fiber To The Home (FTTH)
- Small diameter & Light weight
- Fiber To The Building/Premise/Curb (FTTB/FTTP/FTTC)
- No lightning risk

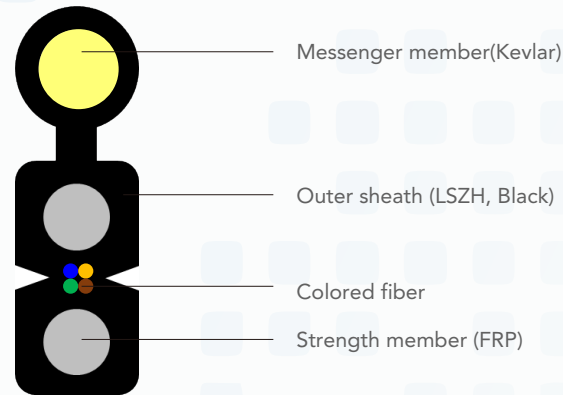

Dimensions and Properties

Physical	Fiber count	1-4 G.657A1
	Cable OD(W*H)	2.0+0.2 mm*5.0+0.2mm
	Cable weight	13.5kg/km+15%
	Operation temperature range	-40 °C to + 70 °C
	Installation temperature range	-20 °C to + 60 °C
Mechanical	Transport and storage temperature range	-40 °C to + 70 °C
	Max. tensile load	Short term:300N Long term:150N
	Crush resistance	Short term:1000N/10cm Long term: 300N/10cm
	Minimal installation bending radius	50mm
	Minimal operation bending radius	30mm

It is Time to Redefine
High Quality Network

ALL DIELECTRIC DROP CABLE