





Copper Cable Series Products

Copper wire series products

S/FTP CAT8 LAN Cable


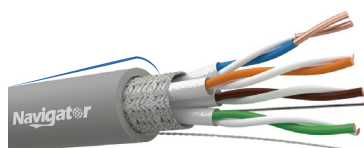


- Sheath
- Insulation
- Conductor
- Drain
- Wire Al-Foil
- Braiding
- Rip Cord

Product features

- ❏ Conductor Size: 22AWG
- ❏ Conductor Material: Pure Copper (Purity 99.99%)
- ❏ Insulation Material: HDPE+FMPE+HDPE
- ❏ Pair Twisted Material: AL-Foil+Braiding
- ❏ Sheath Material: PVC, LSZH, TPU
- ❏ Temperature Rating: -20~+75°C
- ❏ Package: 305m/Roll
- ❏ Max. Tensile (Install): 110N
- ❏ Min. Bending Radius (Install): 8xOD

S/FTP CAT6A LAN Cable


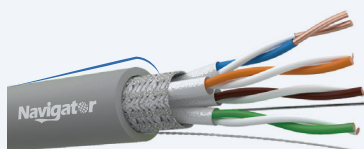


- Sheath
- Al-Foil
- Braiding
- Drain Wire
- Conductor
- Insulation
- Rip Cord

Product features

- ❏ Conductor Size: 23AWG
- ❏ Conductor Material: Pure Copper (Purity 99.99%)
- ❏ Insulation Material: HDPE+FMPE+HDPE
- ❏ Pair Twisted Material: AL-Foil+Braiding
- ❏ Sheath Material: PVC, LSZH, TPU
- ❏ Temperature Rating: -20~+75°C
- ❏ Package: 305/Roll, 500m/Roll
- ❏ Max. Tensile (Install) : 110N
- ❏ Min. Bending Radius (Install): 8xOD

U/UTP CAT6A LAN Cable


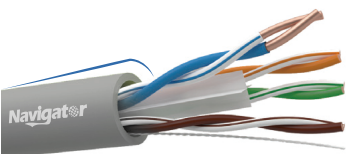


- Sheath
- Conductor
- Rip Cord
- Insulation
- Twisted Pair
- Separator

Product features

- ❏ Conductor Size: 23AWG
- ❏ Conductor Material: Pure Copper (Purity 99.99%)
- ❏ Insulation Material: HDPE
- ❏ Separator: PE
- ❏ Sheath Material: PVC, LSZH, TPU
- ❏ Temperature Rating: -20~+75°C
- ❏ Package: 305/Roll, 500m/Roll
- ❏ Max. Tensile (Install) : 110N
- ❏ Min. Bending Radius (Install): 8xOD

F/UTP CAT6 LAN Cable


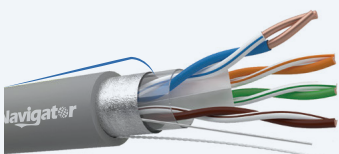


- Sheath
- Al-Foil
- Mylar
- Conductor
- Drain Wire
- Insulation
- Rip Cord
- Twisted Wire
- Separator

Product features

- ❏ Conductor Size: 23AWG
- ❏ Conductor Material: Pure Copper (Purity 99.99%)
- ❏ Insulation Material: HDPE
- ❏ Separator: PE
- ❏ Sheath Material: PVC, LSZH, TPU
- ❏ Temperature Rating: -20~+75°C
- ❏ Package: 305/Roll, 500m/Roll
- ❏ Max. Tensile (Install) : 110N
- ❏ Min. Bending Radius (Install): 8xOD

SF/UTP CAT6 LAN Cable

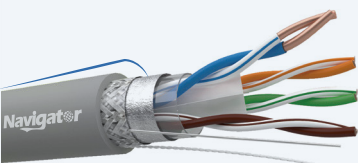

- Sheath
- Braiding
- Al-Foil
- Mylar
- Conductor
- Drain Wire
- Insulation
- Rip Cord
- Twisted Wire
- Separator

- ❏ Conductor Size: 23AWG
- ❏ Conductor Material: Pure Copper (Purity 99.99%)
- ❏ Insulation Material: HDPE
- ❏ Separator: PE
- ❏ Sheath Material: PVC, LSZH, TPU
- ❏ Temperature Rating: -20~+75°C
- ❏ Package: 305/Roll, 500m/Roll
- ❏ Max. Tensile (Install) : 110N
- ❏ Min. Bending Radius (Install): 8xOD