




# DROP CABLE FLAT

## Features & Applications:

- Aerial installation
- Easy & simple installation
- Fiber To The Home (FTTH)
- Small diameter & Light weight
- Fiber To The Building/Premise/Curb (FTTB/FTTP/FTTC)
- No lightning risk

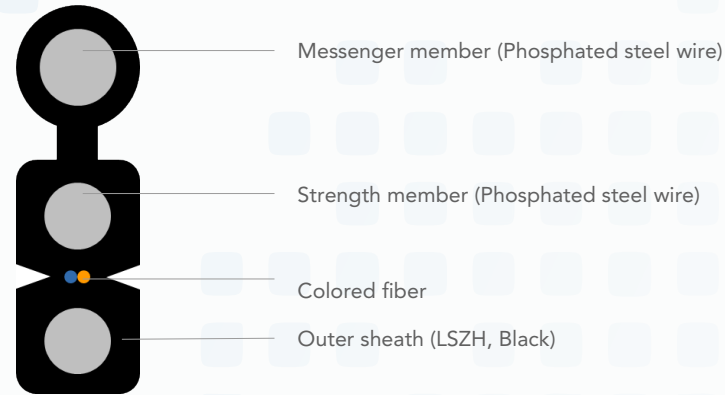

## Dimensions and Properties

	Fiber type	ITU-T G.657A2
Physical	Fiber count	1-2
	Cable OD (H * subunit W * W) - mm ± 0.1mm	2.0 * 3.0 * 5.0
	Cable weight – kg/km ± 15%	20
	Operation temperature range	-40 °C a + 70 °C
	Installation temperature range	-20 °C a + 60 °C
	Transport and storage temperature range	-40 °C a + 70 °C
Mechanical	Max. tensile load (MAT) – N	600
	Crush resistance – N/10cm	2200
	Minimal installation bending radius - mm	40
	Minimal operation bending radius - mm	20

*It is Time to Redefine High Quality Network*

# DROP CABLE FLAT